

# SD100产品外形图、安装孔位尺寸

## 1.1 产品外形图

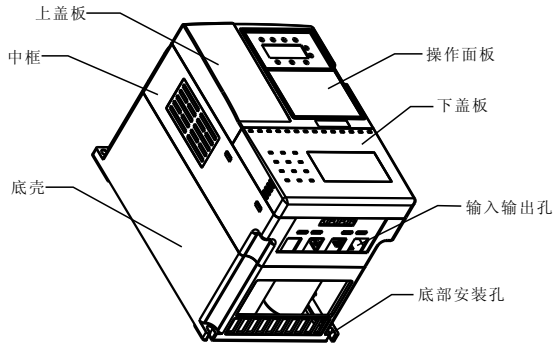


图1-1 变频器外形图

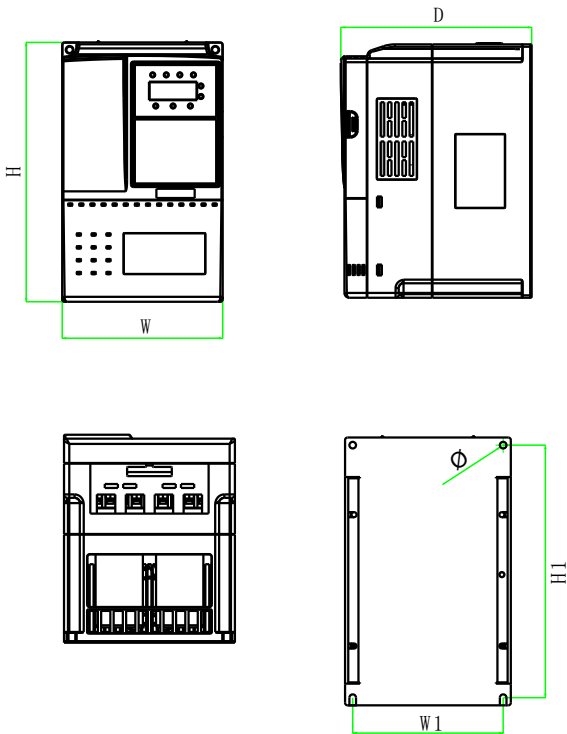


图1-2 7.5KW以下机型的外形尺寸及安装尺寸示意图

## 2.1 安装孔位尺寸

SD100变频器外型及安装尺寸

变频器型号	H (mm)	W (mm)	D (mm)	H1 (mm)	W1 (mm)	孔径 (mm)	毛重 (kg)
SD100-2S-0.4G	190	110	150	178	98	Ø5	2.4
SD100-2S-0.7G	190	110	150	178	98	Ø5	2.4
SD100-2S-1.5G	190	110	150	178	98	Ø5	2.4
SD100-2S-2.2G	190	110	150	178	98	Ø5	2.4
SD100-4T-0.7G/1.5P	190	110	150	178	98	Ø5	2.4
SD100-4T-1.5G/2.2P	190	110	150	178	98	Ø5	2.4
SD100-4T-2.2G/3.7P	190	110	150	178	98	Ø5	2.4
SD100-4T-3.7G/5.5P	210	130	160	198	118	Ø5	3.5
SD100-4T-5.5G/7.5P	250	155	176	236	141	Ø5	4.5
SD100-4T-7.5G/11P	250	155	176	236	141	Ø5	4.5
SD100-4T-11G/15P	280	170	158	266	135	Ø6	6
SD100-4T-15G/18.5P	330	220	210	316	140	Ø7	10
SD100-4T-18.5G/22P	330	220	210	316	140	Ø7	10
SD100-4T-22G/30P	380	250	222	366	150	Ø7	14
SD100-4T-30G/37P	440	270	249	426	180	Ø7	21
SD100-4T-37G/45P	550	300	255	534	200	Ø9	28
SD100-4T-45G/55P	550	300	255	534	200	Ø9	28
SD100-4T-55G/75P	550	300	255	534	200	Ø9	32
SD100-4T-75G/90P	650	370	280	625	250	Ø9	52
SD100-4T-90G/110P	650	370	280	625	250	Ø9	55